



>>> IKO Shingle Stick®

## Mastics

### Your Benefits:

- IKO mastics allow you to work in strong wind areas, on slopes greater than 60° and in colder weather conditions
- IKO mastics are all 100 % compatible with IKO shingles
- Completely impermeable to water
- Excellent adhesion to bituminous materials
- Superb adhesion to concrete, asbestos cement, zinc and metals
- Easy application
- Resistant to diluted acids and alkalis

## Nails

### Your Benefits:

- Top quality nails allow durable shingle installation at minimal cost
- IKO nails do not rust or damage shingles

# Mastics & Nails


# ACCESSORIES • Mastics & Nails

## • Shingle Stick®

is an elastomeric bitumen based mastic and has a lasting plasticity.

- The surface should be clean, dust free, degreased and free from loose particles SHINGLE STICK may be applied on slightly damp surfaces.
- When the slope of the roof is greater than 60° or where the shingles are exposed to low temperatures, violent winds or are in the shade, provide extra adhesion with blobs of SHINGLE STICK (25mm diameter, 1mm thick).

	Shingle Stick®	Plastal Stick®	Plastal®
<b>Colour</b>	Black	Black	Black
<b>Density at 20°C</b>	± 1,2 kg/l	± 1,2 kg/l	± 1,2 kg/l
<b>Drying time – RH 50–60 % – touch dry</b>	± 24 h	± 24 h	± 24 h
<b>Flash point</b>	± 24° C	± 24° C	± 24° C
<b>Temperature resistance</b>	from – 20 to 80 °C	from – 20 to 80 °C	from – 20 to 80 °C
<b>Application</b>	from 0 to 40 °C	from 0 to 40 °C	from 0 to 40 °C
<b>Packaging</b>	310 ml	310 ml	5 kg

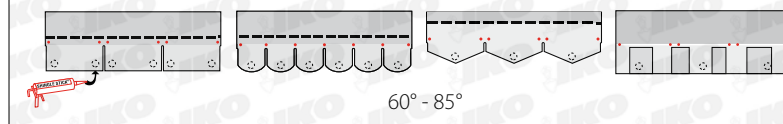

(\* Registered average values)

## • Plastal Stick® and Plastal®

are oxidised bitumen based mastics.

## • IKO Nails®

are hot galvanised extra large head professional steel wire roofing nails.

	IKO Nails®
<b>Diameter shaft</b>	2,7 mm
<b>Diameter head</b>	≥ 9 mm
<b>Length</b>	25 mm
<b>Zinc coating</b>	300 g/m <sup>2</sup>
<b>Packaging</b>	10 kg and 23 kg (1 kg = ± 560 pc.)



(\* Registered average values)



IKO Sales International NV

I.Z. Ravenshout 3.815 • Nijverheidsweg 87 • 3945 Ham • Belgium  
T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30 • E support@iko.be • www.iko.be

**IKO**  
The Shingles Expert

The information is subject to change without prior notice.

Consult our shingle overview leaflet or website [www.iko.be](http://www.iko.be) for colour availability of the products and application instructions