

# HIGH-END TRADITIONAL SHINGLES • Superior quality fibreglass high grade bitumen




>>> *Diamant® (31) Slate*



# HIGH-END TRADITIONAL SHINGLES • Superior quality fibreglass high grade bitumen

## Your Benefits:

- Superior quality fibreglass high grade bitumen shingle
- Thicker glassfibre inlay
- Higher bitumen content
- Available in many shapes and colours
- Exceeds the most stringent worldwide standards

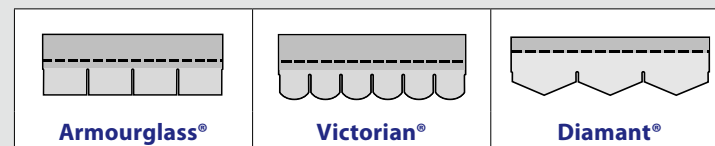

<b>Length</b> (EN 544)	1000 mm (± 3)	1000 mm (± 3)	1000 mm (± 3)
<b>Width</b> (EN 544)	336 mm (± 3)	336 mm (± 3)	284 mm (± 3)
<b>Weight</b> (slope > 25°)	± 10,9 kg/m <sup>2</sup>	± 10,5 kg/m <sup>2</sup>	± 10,5 kg/m <sup>2</sup>
<b>Coverage/bundle</b>	3 m <sup>2</sup>	3 m <sup>2</sup>	3 m <sup>2</sup>
<b>Shingles/bundle</b>	21	21	27
<b>Bundles/pallet</b>	48	48	42

<b>Granule adhesion</b> (EN 12039)	max. 1,2 g	max. 1,2 g	max. 1,2 g
<b>Tensile length*</b> (EN 12311-1)	1000 N/50 mm	1000 N/50 mm	1000 N/50 mm
<b>Tensile width*</b> (EN 12311-1)	700 N/50 mm	700 N/50 mm	700 N/50 mm
<b>Elongation length*</b> (EN 12311-1)	3,00 %	3,00 %	3,50 %
<b>Elongation width*</b> (EN 12311-1)	3,00 %	3,00 %	3,50 %
<b>Nail tear resistance*</b> (EN 12311-1)	160 N	160 N	160 N
<b>Product Performance</b> (F)	NF	NF	NF

<b>Fire resistance</b>	DIN 4102/7	DIN 4102/7	DIN 4102/7
	PN-B-02872/1996	PN-B-02872/1996	PN-B-02872/1996
	CE	CE	CE
<b>External fire performance</b>	B <sub>roof</sub> T <sub>1</sub>	B <sub>roof</sub> T <sub>1</sub>	B <sub>roof</sub> T <sub>1</sub>
<b>Reaction to fire</b>	Class E	Class E	Class E

\* Registered average values.



**IKO Sales International NV**

I.Z. Ravenshout 3.815 • Nijverheidsweg 87 • 3945 Ham • Belgium  
 T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30 • E support@iko.be • [www.iko.be](http://www.iko.be)



The information is subject to change without prior notice.

Consult our shingle overview leaflet or website [www.iko.be](http://www.iko.be) for colour availability of the products and application instructions