




LAMINATED SHINGLES • Self-adhesive laminated shingle



>>> Cambridge Xtreme 9,5° (52) Dual Black

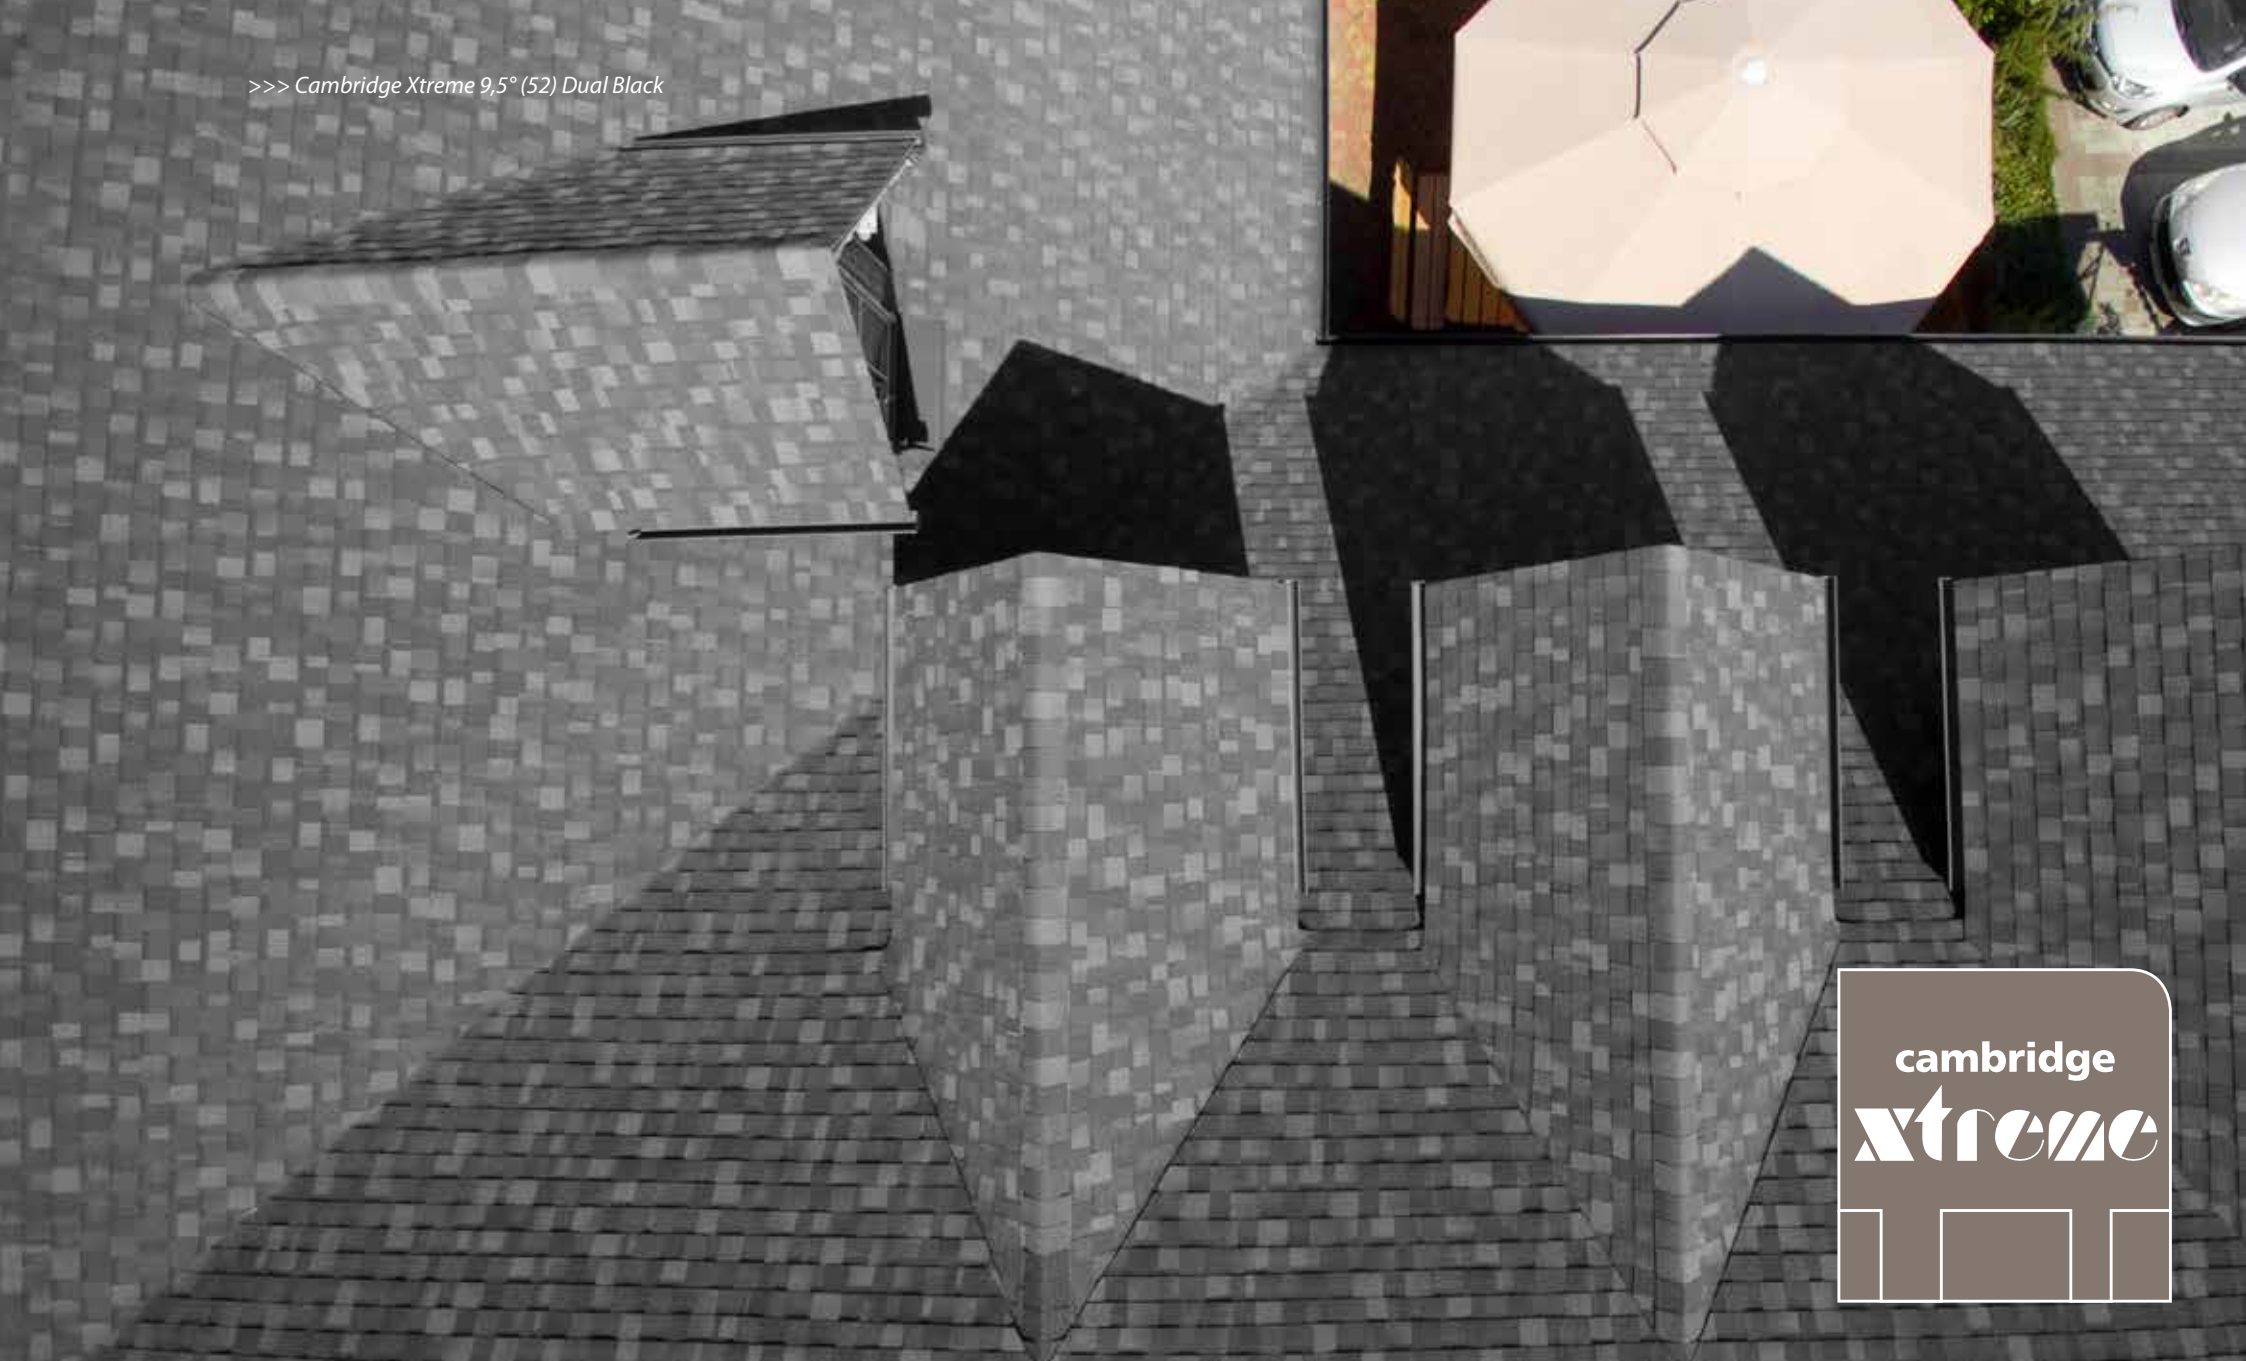




LAMINATED SHINGLES • Self-adhesive laminated shingle

Your Benefits:

- Xtreme slope : $\geq 9,5^\circ$ (!) - $\leq 90^\circ$
- Xtreme resistance to high wind & heavy rain: tested and approved
- Xtreme unique: the world's first self-adhesive laminated shingle
- Xtreme European quality
- Xtreme shingle guarantee: 15 years full Platinum guarantee & 30 years total guarantee



Cambridge Xtreme 9,5°

Width (EN 544)	1038 mm (± 3)
Height (EN 544)	349 mm (± 3)
Weight (slope > 25°)	11,8 kg/m ²
Coverage/bundle	3,1 m ²
Shingles/bundle	20
Bundles/pallet	45

Granule adhesion (EN 12039)	max. 1,2 g
Tensile strength (width)* (EN 12311-1)	850 N/50 mm
Tensile strength (height)* (EN 12311-1)	550 N/50 mm
Elongation (width)* (EN 12311-1)	3,50 %
Elongation (height)* (EN 12311-1)	3,50 %
Nails shank tear resistance* (EN 12311-1)	140 N
Wind resistance (tunnel test: slope 25°)	up to 200 km/h

External fire performance (EN 13501-5)	$B_{roof}(t_1) / B_{roof}(t_2)$
Reaction to fire (EN 13501-1)	Class E

*Registered average values



IKO Sales International NV
 Truibroek 74 • 3945 Ham • Belgium
T+32 (0)11 34 01 20 • **F**+32 (0)11 34 01 30
E residential.europe@iko.com • www.iko.be





LAMINATED SHINGLES • Double-layer shingle with “Cambridge Xpress Lane”



>>> Cambridge Xpress® (49) Earthtone Cedar





LAMINATED SHINGLES • Double-layer shingle with “Cambridge Xpress Lane”

Your Benefits:

- Most efficient laminated shingle in the world: larger shingle size (more coverage than any standard shingle) and very quick to install
- Extra large nailing area, known as the “**Cambridge Xpress Lane**”, for improved nailing shingle performance (especially on steep roofs) and faster implementation of the shingles
- Double-layer shingle with a dimensional wood shake look in natural tones and colours
- Best choice for the home-owner with its water-shedding and weather-resistant construction
- Excellent solution for renovation projects



Cambridge Xpress

Width (EN 544)	1038 mm (± 3)
Height (EN 544)	349 mm (± 3)
Weight (slope > 25°)	11,6 kg/m ²
Coverage/bundle	3,1 m ²
Shingles/bundle	20
Bundles/pallet	45

Granule adhesion (EN 12039)	max. 1,2 g
Tensile strength (width)* (EN 12311-1)	850 N/50 mm
Tensile strength (height)* (EN 12311-1)	550 N/50 mm
Elongation (width)* (EN 12311-1)	3,50 %
Elongation (height)* (EN 12311-1)	3,50 %
Nails shank tear resistance* (EN 12311-1)	140 N

External fire performance (EN 13501-5)	B _{roof} (t _i)
Reaction to fire (EN 13501-1)	Class E

* Registered average values



IKO Sales International NV
 Truibroek 74 • 3945 Ham • Belgium
 T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30
 E residential.europe@iko.com • www.iko.be

