

HIGH-END TRADITIONAL SHINGLES • Superior quality fibreglass high grade bitumen




>>> *Diamant® (31) Slate*



HIGH-END TRADITIONAL SHINGLES • Superior quality fibreglass high grade bitumen

Your Benefits:

- Superior quality fibreglass high grade bitumen shingle
- Thicker glassfibre inlay
- Higher bitumen content
- Available in many shapes and colours
- Exceeds the most stringent worldwide standards

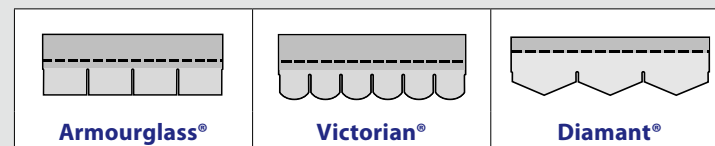

Length (EN 544)	1000 mm (± 3)	1000 mm (± 3)	1000 mm (± 3)
Width (EN 544)	336 mm (± 3)	336 mm (± 3)	284 mm (± 3)
Weight (slope > 25°)	± 10,9 kg/m ²	± 10,5 kg/m ²	± 10,5 kg/m ²
Coverage/bundle	3 m ²	3 m ²	3 m ²
Shingles/bundle	21	21	27
Bundles/pallet	48	48	42

Granule adhesion (EN 12039)	max. 1,2 g	max. 1,2 g	max. 1,2 g
Tensile length* (EN 12311-1)	1000 N/50 mm	1000 N/50 mm	1000 N/50 mm
Tensile width* (EN 12311-1)	700 N/50 mm	700 N/50 mm	700 N/50 mm
Elongation length* (EN 12311-1)	3,00 %	3,00 %	3,50 %
Elongation width* (EN 12311-1)	3,00 %	3,00 %	3,50 %
Nail tear resistance* (EN 12311-1)	160 N	160 N	160 N
Product Performance (F)	NF	NF	NF

Fire resistance	DIN 4102/7	DIN 4102/7	DIN 4102/7
	PN-B-02872/1996	PN-B-02872/1996	PN-B-02872/1996
	CE	CE	CE
External fire performance	B _{roof} T ₁	B _{roof} T ₁	B _{roof} T ₁
Reaction to fire	Class E	Class E	Class E

* Registered average values.



IKO Sales International NV

I.Z. Ravenshout 3.815 • Nijverheidsweg 87 • 3945 Ham • Belgium
 T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30 • E support@iko.be • www.iko.be



The information is subject to change without prior notice.

Consult our shingle overview leaflet or website www.iko.be for colour availability of the products and application instructions