


# Number One Shingle



## Number One 3Tab



- 1 Self Sealing Dots
- 2 Coloured granules
- 3 Top coating bitumen
- 4 Saturated glass mat
- 5 Back coating bitumen
- 6 Fine mineral
- 7 Anti adhesive strip

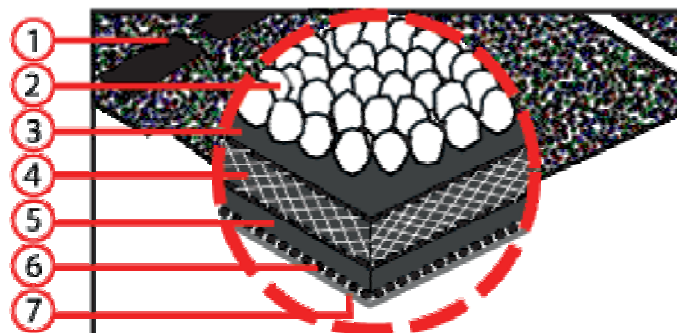


### FIELD APPLICATION

Roofing material for commercial and Residential constructions with a roof pitch between 15° and 85°.

### COLORS

- 97 - Brown
- 95 - Green
- 92 - Black
- 91 - Grey
- 90 - Red

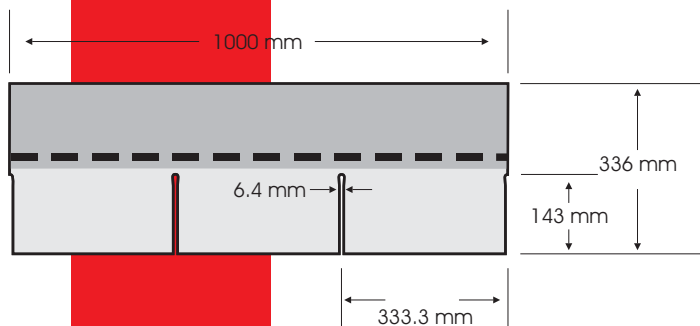

|                  |                       |
|------------------|-----------------------|
| Length           | 1000 mm (+/-3)        |
| Width            | 336 mm (+/-3)         |
| Weight           | 9,4 kg/m <sup>2</sup> |
| Coverage/bundle  | 3,00 m <sup>2</sup>   |
| Schingles/bundle | 21                    |
| Bundles/palet    | 54                    |

### TECHNICAL INFORMATION

|                         | <i>Tensile strength</i>     |              | <i>Elongation</i> |              | <i>Nail tear</i> |
|-------------------------|-----------------------------|--------------|-------------------|--------------|------------------|
|                         | <i>Length</i>               | <i>Width</i> | <i>Length</i>     | <i>Width</i> |                  |
| <i>Minimum</i>          | ≥ 600N                      | ≥ 400N       | ≥ 2,5%            | ≥ 2,5%       | ≥ 100N           |
| <i>Average value</i>    | ≥ 900N                      | ≥ 600N       | ≥ 3,5%            | ≥ 3,5%       | 140N             |
| <i>Granule adhesion</i> | Max. 1,2 gr./m <sup>2</sup> |              |                   |              |                  |

